



(72) PETERSEN, CONNY, DK


(71) ROCKWOOL INTERNATIONAL A/S, DK

(51) Int. Cl.<sup>7</sup> D04H 1/56, D01D 5/098, B05C 9/04, B05B 13/02

(30) 1997/05/28 (DK 614/97) DK

(54) **INSTALLATION ET PROCÉDÉ POUR ENDUIRE UN ÉLÉMENT  
EN FIBRES MINÉRALES À PLUSIEURS CÔTÉS**

(54) **PLANT AND PROCESS FOR COATING A MULTI-SIDED  
MINERAL FIBRE ELEMENT**

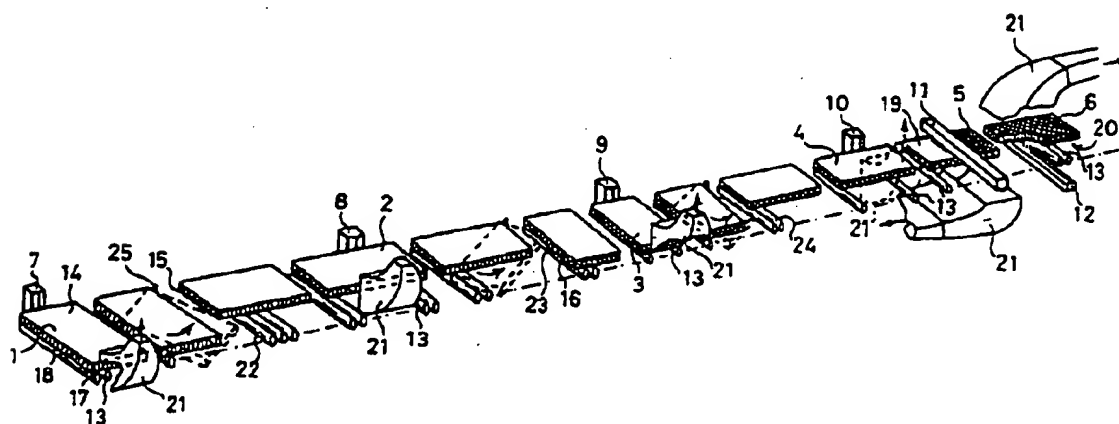

(57) Cette invention se rapporte à une installation et à un procédé permettant d'enduire une couche de base en fibres minérales à plusieurs côtés avec un revêtement de surface se présentant sous la forme d'un tissu non tissé fibreux constitué par un matériau polymère thermoplastique sur au moins une partie d'au moins deux côtés de la couche de base, afin de former un élément en fibres minérales. Cette installation comprend au moins deux dispositifs de revêtement, un moyen permettant de faire fondre un matériau polymère thermoplastique, un moyen pour acheminer le matériau polymère fondu ainsi obtenu jusqu'aux dispositifs de revêtement, lesquels

(57) A plant and a process for coating a multi-sided mineral fibre base layer with a surface coating in the form of a fibrous non-woven fabric formed of a thermoplastic polymer material on at least part of at least two sides of the base layer to form a mineral fibre element, wherein the plant comprises two or more coating devices, means for melting a thermoplastic polymer material, means for supplying the polymer melt obtained to the coating devices, wherein each coating device comprises a number of dispensing units comprising a number of orifices, means for extruding the polymer melt obtained through the orifices and

PCT

ORGANISATION MONDIALE DE LA PROPRIÉTÉ INTELLECTUELLE  
Bureau international

DEMANDE INTERNATIONALE PUBLIÉE EN VERTU DU TRAITE DE COOPERATION EN MATIÈRE DE BREVETS (PCT)

|  |    |  |
|--|----|--|
| (51) Classification internationale des brevets <sup>6</sup> :<br>C03C 17/42  | A1 | (11) Numéro de publication internationale: WO 98/23549<br>(43) Date de publication internationale: 4 juin 1998 (04.06.98)  |
| <p>(21) Numéro de la demande internationale: PCT/FR97/02068</p> <p>(22) Date de dépôt international: 18 novembre 1997 (18.11.97)</p> <p>(30) Données relatives à la priorité:<br/>96/14405 26 novembre 1996 (26.11.96) FR</p> <p>(71) Déposant (pour tous les Etats désignés sauf US):<br/>SAINT-GOBAIN VITRAGE [FR/FR]; 18, avenue d'Alsace, F-92400 Courbevoie (FR).</p> <p>(72) Inventeurs; et<br/>(75) Inventeurs/Déposants (US seulement): AZZOPARDI, Marie-José [FR/FR]; 35, rue Condorcet, F-75009 Paris (FR). DELATTRE, Laurent [FR/FR]; 83, rue Château des Rentiers, F-75013 Paris (FR). TALPAERT, Xavier [FR/FR]; 46, avenue Simon Bolivar, F-75019 Paris (FR).</p> <p>(74) Mandataire: LEBAS, Jean-Pierre; Saint-Gobain Recherche, 39, quai Lucien Lefranc, F-93300 Aubervilliers (FR).</p>  |    | <p>(81) Etats désignés: JP, KR, US, brevet européen (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Publiée<br/>Avec rapport de recherche internationale.</p> |
| <p>(54) Title: SUBSTRATE WITH IMPROVED HYDROPHILIC OR HYDROPHOBIC PROPERTIES, COMPRISING IRREGULARITIES</p> <p>(54) Titre: SUBSTRAT A PROPRIETES HYDROPHILES OU HYDROPHOBES AMELIOREES, COMPORTANT DES IRREGULARITES</p> <p>(57) Abstract</p> <p>The invention concerns a substrate with at least one part of one of its faces having a geometry, optionally obtained by a coating, and which differs from that of that of an ideally even lap, perfectly plane or even slightly convex, in that it has a surface with bulges and hollows capable of being defined by submicron dimensions which, largely, belong to at least two different categories the respective representative values of which vary by a factor at least equal to 5 and at most equal to 1/5. This substrate is useful for an antisoiling and antimist or rainproof glazing. The invention also concerns the methods for preparing the substrate.</p> <p>(57) Abrégé</p> <p>Substrat dont au moins une partie d'au moins une des faces présente une géométrie, éventuellement obtenue au moyen d'un revêtement, et qui diffère de celle d'une nappe régulière idéale, parfaitement plane ou même légèrement bombée, en ce qu'elle présente un relief en bosses et creux pouvant être définis par des dimensions submicroniques qui, dans leur quasi-totalité, appartiennent à au moins deux classes différentes dont les valeurs représentatives respectives varient d'un facteur au moins égal à 5 ou au plus égal à 1/5; applications de ce substrat à un vitrage anti-salissures et anti-buée ou anti-pluie; procédés de préparation de substrat.</p> |    |  |

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |  |   |   |
|--|--|---|---|
| (51) International Patent Classification <sup>6</sup> :<br>C03B 18/00, 15/02, 13/00, 18/02, C03C<br>17/00, 25/02, B32B 17/06   |  | A1  | (11) International Publication Number: <b>WO 97/11916</b> |
| (21) International Application Number: PCT/US96/14502  |  | (43) International Publication Date: 3 April 1997 (03.04.97)  |   |
| (22) International Filing Date: 9 September 1996 (09.09.96)  |  | (74) Agents: KUSHMAN, James, A. et al.; Brooks & Kushman,<br>1000 Town Center, Twenty-Second floor, Southfield, MI<br>48075 (US).   |   |
| (30) Priority Data:<br>534,404 27 September 1995 (27.09.95) US   |  | (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,<br>BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,<br>HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS,<br>LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL,<br>PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA,<br>UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ,<br>UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ,<br>TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR,<br>GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,<br>BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). |   |
| (60) Parent Application or Grant<br>(63) Related by Continuation<br>US 534,404 (CON)<br>Filed on 27 September 1995 (27.09.95)  |  | Published<br>With international search report.  |   |
| (71) Applicant (for all designated States except US): GLASSTECH,<br>INC. [US/US]; Ampoint Industrial Park, 995 Fourth Street,<br>Perrysburg, OH 43552 (US).  |  |   |   |
| (72) Inventors; and<br>(75) Inventors/Applicants (for US only): MALTBY, Robert, J., Jr.<br>[US/US]; 7869 McCutcheonville Road, Wayne, OH 43466<br>(US). VILD, Michael, J. [US/US]; 2526 Meadowwood<br>Street, Toledo, OH 43606 (US). WETMORE, Kenneth, H.<br>[US/US]; 647 Oak Knoll Drive, Perrysburg, OH 43551<br>(US). |  |   |   |

(54) Title: METHOD AND APPARATUS FOR COATING GLASS SHEET RIBBON AND RESULTANT COATED GLASS SHEET

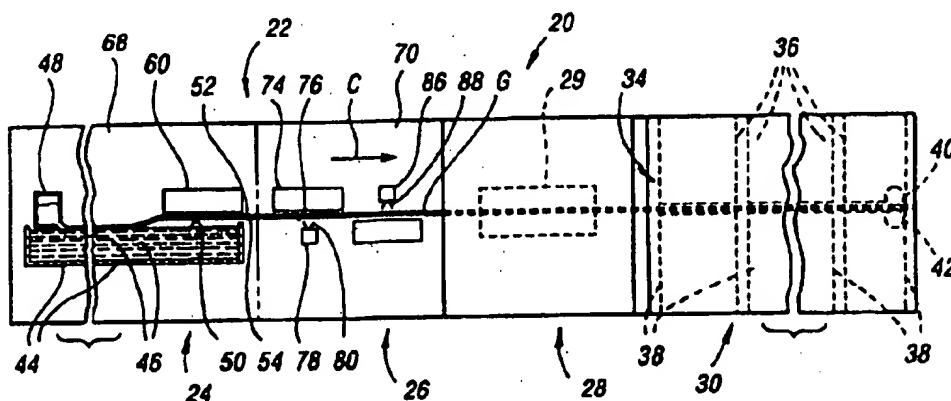

(57) Abstract

Forming apparatus (22) and a method for forming a glass sheet ribbon (G) delivered from a flat tank (44) to a topside support dev  
ice (74) having a downwardly facing surface to which a vacuum and pressurized gas are supplied to support the glass sheet ribbon (G) at  
its upper surface (52) while a coater (78) applies a coating (80) to its lower surface (54). Another coater (86) applies a coating (88) to the  
upper surface (52) of the glass sheet ribbon (G). A coated glass sheet (32) cut from the glass sheet ribbon (G) has at least one surface, and  
as disclosed both of its surfaces (52, 54), coated so as to be protected from deterioration caused by exposure to the atmosphere.

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|   |  |  |
|---|--|--|
| <b>(51) International Patent Classification <sup>6</sup>:</b><br>C22C 33/02, C21D 7/00, I/32  | <b>A1</b>  | <b>(11) International Publication Number:</b> WO 97/42351<br><b>(43) International Publication Date:</b> 13 November 1997 (13.11.97) |
| <b>(21) International Application Number:</b> PCT/CA97/00304<br><b>(22) International Filing Date:</b> 2 May 1997 (02.05.97)<br><br><b>(30) Priority Data:</b><br>08/642,679      3 May 1996 (03.05.96)      US<br><br><b>(71) Applicant:</b> STACKPOLE LIMITED [CA/CA]; 2430 Royal Windsor Drive, Mississauga, Ontario L5J 1K7 (CA).<br><br><b>(72) Inventors:</b> SHIVANATH, Rohith; 238 Aldercrest Road, Toronto, Ontario M8W 4J7 (CA). JONES, Peter; 3 Dalston Road, Toronto, Ontario M8W 4R4 (CA).<br><br><b>(74) Agent:</b> GIERCZAK, Eugene. J., A.; Keyser Mason Ball, Suite 701, 201 City Centre Drive, Mississauga, Ontario L5B 2T4 (CA). | <b>(81) Designated States:</b> AL, AM, AU, AZ, BB, BG, BR, BY, CA, CN, CZ, EE, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, RO, RU, SD, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).<br><br><b>Published</b><br><i>With international search report.</i> |  |
| <b>(54) Title:</b> MAKING METAL POWDER ARTICLES BY SINTERING, SPHEROIDIZING AND WARM FORMING<br><br><b>(57) Abstract</b><br><br>A method of making a sintered article of powder metal having a carbon composition in the range of about 0.8 % to 2.0 % by weight, then spheroidizing the sintered article and then warm forming the sintered article at a temperature between 250 and 700 °C for a time duration selected to form the article to a final shape.   |  |  |

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19)



JAPANESE PATENT OFFICE

PATENT ABSTRACTS OF JAPAN

(11) Publication number: **03122274 A**

(43) Date of publication of application: **24.05.91**

(51) Int. Cl. **C23C 14/40**  
**H01L 21/203**  
**H01L 21/31**

(21) Application number: **01258675**

(22) Date of filing: **06.10.89**

(71) Applicant: **ASAHI GLASS CO LTD**

(72) Inventor: **MIYAMURA KENRO**  
**KATAGIRI YOSHITAKA**

(54) **PRODUCTION OF THIN FILM AND DEVICE THEREOF**


film deposition is, therefore, executed.

COPYRIGHT: (C)1991,JPO&Japio

(57) Abstract:

**PURPOSE:** To stably obtain a stable discharge characteristic, uniform film thickness distribution and uniform film characteristics over a long period by alternately arranging targets for film formation on both surfaces of substrates apart to the distance at which the interference between high frequencies does not arise from the faced positions.

**CONSTITUTION:** The front and rear targets 11, 13 and 12, 14 of the device for inline production of thin films are alternately arranged apart to such distance at which the high-frequency powers to be impressed thereto do not interfere with each other. The distance to be parted is determined by the sizes of the cathodes and targets 11 to 14, the conditions of the film forming chamber, sputtering conditions, etc. Further, the substrates 5 to 10 and substrate holders 2 to 4 are rotated or advanced in parallel. The different regions of the substrate holders 2 to 4 act as anode in such a manner and the mutual interference between the front and rear high-frequency electric powers is lessened. The stable

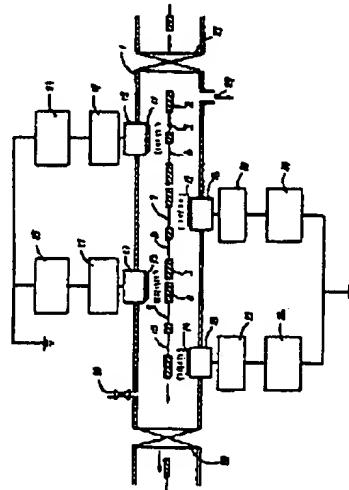

Cardinal Glass Industries, Inc. 44046.203  
DIALOG English-translation of JP Patent

? s pn=JP 3187039  
S8 2 PN=JP 3187039  
? t s8/9/1

8/9/1  
DIALOG(R)File 351:Derwent WPI  
(c) 2003 Thomson Derwent. All rts. reserv.

008999660 \*\*Image available\*\*  
WPI Acc No: 1992-126940/199216  
XRPX Acc No: N92-094653

Optical magnifying power rate compensator for facsimile printer -  
bends light flux direction change mirror to vary magnification of image  
focused on photoreceptive plane NoAbstract Dwg 1/6

Patent Assignee: ASAHI OPTICAL CO LTD (ASAO )

Number of Countries: 001 Number of Patents: 002

Patent Family:

| Patent No  | Kind | Date     | Applicat No | Kind | Date     | Week     |
|------------|------|----------|-------------|------|----------|----------|
| JP 4068856 | A    | 19920304 | JP 90178947 | A    | 19900705 | 199216 B |
| JP 3187039 | B2   | 20010711 | JP 90178947 | A    | 19900705 | 200140   |

Priority Applications (No Type Date): JP 90178947 A 19900705

Patent Details:

Patent No Kind Lan Pg Main IPC Filing Notes

JP 4068856 A 4

JP 3187039 B2 4 H04N-001/028 Previous Publ. patent JP 4068856

Title Terms: OPTICAL; MAGNIFY; POWER; RATE; COMPENSATE; FACSIMILE;  
PRINT; BEND; LIGHT; FLUX; DIRECTION; CHANGE; MIRROR; VARY; MAGNIFY;  
IMAGE; FOCUS; PHOTORECEIVER; PLANE; NOABSTRACT

Derwent Class: P81; V07; W02

International Patent Class (Main): H04N-001/028

International Patent Class (Additional): G02B-007/19; G02B-007/198;

G02B-017/00; H04N-001/02; H04N-001/04; H04N-001/19

File Segment: EPI; EngPI

Manual Codes (EPI/S-X): V07-K05; W02-J01A; W02-J02A1

? t s8/9/2

8/9/2  
DIALOG(R)File 351:Derwent WPI  
(c) 2003 Thomson Derwent. All rts. reserv.

008780135 \*\*Image available\*\*  
WPI Acc No: 1991-284152/ 199139  
XRAM Acc No: C91-123031  
XRPX Acc No: N91-217328

Opto-magnetic recording medium with improved recording density - has  
silicon carbide-nitride dielectric layer, magnetic layer and reflection  
layer

Patent Assignee: SHINETSU CHEM IND CO LTD (SHIE )

Number of Countries: 001 Number of Patents: 001

Patent Family:

| Patent No  | Kind | Date     | Applicat No | Kind | Date     | Week     |
|------------|------|----------|-------------|------|----------|----------|
| JP 3187039 | A    | 19910815 | JP 89325208 | A    | 19891215 | 199139 B |

Priority Applications (No Type Date): JP 89325208 A 19891215



## PATENT ABSTRACTS OF JAPAN

(11) Publication number: **03193872 A**(43) Date of publication of application: **23.08.91**

(51) Int. Cl.

**C23C 14/40**  
**G11B 5/85**
(21) Application number: **01332255**(22) Date of filing: **21.12.89**(71) Applicant: **TDK CORP**
(72) Inventor: **MORITA HARUYUKI**  
**KITAHARA YOSHIMI**  
**UNO YASUSHI**
**(54) HIGH-FREQUENCY SPUTTERING METHOD AND  
 PRODUCTION OF MAGNETIC RECORDING  
 MEDIUM**
**(57) Abstract:**

**PURPOSE:** To obtain a magnetic layer uniform in thickness and magnetic characteristic at the time of simultaneously forming a film by sputtering on both principal planes of a substrate by deviating the sputtering frequency on one side of the substrate from that on the other side by a specified frequency.

**CONSTITUTION:** A target is respectively opposed to the principal planes of a substrate, and a film is simultaneously formed on both principal planes of the

substrate by high-frequency sputtering. In this case, when the frequency of the high-frequency sputtering performed on one principal plane of the substrate is estimated at  $f_A$  MHz and that on the other principal plane at  $f_B$  MHz,  $0.0032|f_A - f_B| \leq 20.013$ ,  $f_A = 13.56000 \pm 0.00678$  and  $f_B = 13.56000 \pm 0.00678$  must be fulfilled. When  $|f_A - f_B|$  is less than the above-mentioned range, the uniformity in the film thickness is affected by the mutual intervention between the electric fields on both sides of the substrate, and the upper limit of  $|f_A - f_B|$  is obtained from the above-mentioned ranges of  $f_A$  and  $f_B$ .

COPYRIGHT: (C)1991,JPO&amp;Japio



POWERED BY Dialog

**Glazing with multi-layer coating - providing chosen reflection colour esp. in blue region**  
**Patent Assignee:** SAINT-GOBAIN VITRAGE; SAINT-GOBAIN VITRAGE INT  
**Inventors:** BALIAN P; OUDARD J; ZAGDOUM G; BALLAN P; ZAGDOUM G; OUDARD J F

## Patent Family

| Patent Number | Kind | Date     | Application Number | Kind | Date     | Week   | Type |
|---------------|------|----------|--------------------|------|----------|--------|------|
| FR 2704545    | A1   | 19941104 | FR 935056          | A    | 19930429 | 199444 | B    |
| WO 9425410    | A1   | 19941110 | WO 94FR429         | A    | 19940418 | 199444 |      |
| NO 9404952    | A    | 19941220 | WO 94FR429         | A    | 19940418 | 199511 |      |
|               |      |          | NO 944952          | A    | 19941220 |        |      |
| FI 9406122    | A    | 19941228 | WO 94FR429         | A    | 19940418 | 199512 |      |
|               |      |          | FI 946122          | A    | 19941228 |        |      |
| EP 648196     | A1   | 19950419 | EP 94913656        | A    | 19940418 | 199520 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| CZ 9403335    | A3   | 19950816 | CZ 943335          | A    | 19940418 | 199542 |      |
| JP 7508491    | W    | 19950921 | JP 94523942        | A    | 19940418 | 199546 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| US 5520996    | A    | 19960528 | WO 94FR429         | A    | 19940418 | 199627 |      |
|               |      |          | US 95356320        | A    | 19950221 |        |      |
| CN 1108862    | A    | 19950920 | CN 94190250        | A    | 19940418 | 199733 |      |
| EP 648196     | B1   | 19990623 | EP 94913656        | A    | 19940418 | 199929 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| DE 69419224   | E    | 19990729 | DE 619224          | A    | 19940418 | 199936 |      |
|               |      |          | EP 94913656        | A    | 19940418 |        |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| RO 114784     | B1   | 19990730 | RO 2123            | A    | 19940418 | 199941 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| ES 2135573    | T3   | 19991101 | EP 94913656        | A    | 19940418 | 199953 |      |
| BR 9405295    | A    | 19990831 | BR 945295          | A    | 19940418 | 200002 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |
| RU 2127231    | C1   | 19990310 | RU 9446262         | A    | 19940418 | 200023 |      |
|               |      |          | WO 94FR429         | A    | 19940418 |        |      |

**Priority Applications (Number Kind Date):** FR 935056 A ( 19930429)

**Cited Patents:** EP 114282 ; EP 441705 ; EP 501632 ; EP 511044 ; EP 518755 ; EP 530676 ; EP

Cardinal Glass Industries, Inc. 44046.203  
DIALOG English-translation of JP Patent

File 351:Derwent WPI 1963-2003/UD,UM &UP=200318

(c) 2003 Thomson Derwent

\*File 351: Alerts can now have images sent via all delivery methods.  
See HELP ALERT and HELP PRINT for more info.

Set Items Description  
----  
? s pn=JP 7149545  
S4 1 PN=JP 7149545  
? t s4/9/1

4/9/1

DIALOG(R)File 351:Derwent WPI

(c) 2003 Thomson Derwent. All rts. reserv.

010223280 \*\*Image available\*\*

WPI .cc No: 1995-124535/199517

XPAI' Acc No: C95-056715

XRPX Acc No: N95-098539

Transparent glass substrate with multiple coatings - to improve light  
transmission to solar factor ratio

Patent Assignee: SAINT-GOBAIN VITRAGE (COMP ); SAINT-GOBAIN VITRAGE

INT (COMP )

Inventor: GUISELIN O

Number of Countries: 016 Number of Patents: 008

Patent Family:

| Patent No   | Kind | Date     | Applicat No | Kind | Date     | Week -   |
|-------------|------|----------|-------------|------|----------|----------|
| EP 645352   | A1   | 19950329 | EP 94402051 | A    | 19940914 | 199517 B |
| FR 2710333  | A1   | 19950331 | FR 9311339  | A    | 19930923 | 199518   |
| CA 2132254  | A    | 19950324 | CA 2132254  | A    | 19940916 | 199525   |
| JP 7149545  | A    | 19950613 | JP 94229824 | A    | 19940926 | 199532   |
| US 5595825  | A    | 19970121 | US 94309652 | A    | 19940921 | 199710   |
| EP 645352   | B1   | 19980617 | EP 94402051 | A    | 19940914 | 199828   |
| DE 69411107 | E    | 19980723 | DE 611107   | A    | 19940914 | 199835   |
|             |      |          | EP 94402051 | A    | 19940914 |          |
| ES 2119110  | T3   | 19981001 | EP 94402051 | A    | 19940914 | 199848   |

Priority Applications (No Type Date): FR 9311339 A 19930923

Cited Patents: DE 4211363; EP 303109; EP 332717; EP 456487; FR 2669325;

GB 2027925; US 5071206; US 5229881; WO 9002653; WO 9005439

Patent Details:

| Patent No  | Kind | Lan | Pg | Main IPC    | Filing Notes              |
|--|------|-----|----|-------------|---------------------------|
| EP 645352  | A1   | F   | 6  | C03C-017/36 |                           |
| Designated States (Regional): AT BE CH DE DK ES FR GB IT LI LU NL SE |      |     |    |             |                           |
| FR 2710333   | A1   |     | 15 | C03C-017/34 |                           |
| CA 2132254   | A    | F   |    | G02B-005/26 |                           |
| JP 7149545   | A    |     | 6  | C03C-017/34 |                           |
| US 5595825   | A    |     | 6  | B32B-017/06 |                           |
| EP 645352  | B1   | F   |    | C03C-017/36 |                           |
| Designated States (Regional): AT BE CH DE DK ES FR GB IT LI LU NL SE |      |     |    |             |                           |
| DE 69411107  | E    |     |    | C03C-017/36 | Based on patent EP 645352 |
| ES 2119110   | T3   |     |    | C03C-017/36 | Based on patent EP 645352 |

Abstract (Basic): EP 645352 A

The glass substrate (1) is successively coated with a first

Fredrikson & Byron, P.A.  
March 20, 2003



XP 000414263

782

Diamond and Related Materials, 2 (1993) 782-787

p-782-787

## Optical and electronic properties of amorphous diamond

C23C14/06B  
C23C14/32AV. S. Veerasamy, G. A. J. Amaratunga, W. I. Milne and P. Hewitt  
*Engineering Department, Cambridge University, Trumpington Street, Cambridge (UK)*P. J. Fallon  
*Cambridge Laboratory, Cambridge University, Cambridge (UK)*D. R. McKenzie and C. A. Davis  
*School of Physics, University of Sydney, NSW 2006 (Australia)*

## Abstract

The optical and electronic properties of highly tetrahedral amorphous diamond-like carbon (amorphous diamond, a-D) films were investigated. The structure of the films grown on silicon and glass substrates, under similar deposition conditions using a compact filtered cathodic vacuum arc system, are compared using electron energy loss spectroscopy (EELS). Results from hydrogenation of the films are also reported. The hydrogenated films show two prominent IR absorption peaks centred at 2920 and 2840  $\text{cm}^{-1}$ , which are assigned to the stretch mode of the C-H bond in the  $\text{sp}^3$  configuration on the C-H, and C-H sites respectively. The high loss EELS spectra show no reduction in the high  $\text{sp}^3$  content in the hydrogenated films. UV and visible transmission spectra of a-D thin films are also presented. The optical band gap of 2.0–2.2 eV for the a-D films is found to be consistent with the electronic bandgap. The relationship between the intrinsic compressive stress in the films and the refractive index is also presented. The space charge limited current flow is analysed and coupled with the optical absorption data to give an estimate of  $10^{18} \text{ cm}^{-3} \text{ eV}^{-1}$  for the valence band edge density of states.

## 1. Introduction

The filtered cathodic vacuum arc (FCVA) system has recently emerged as a viable technique for depositing thin films [1]. The high kinetic energy of the ions (about 22 eV [2]) in the emitted flux enables deposition of dense homogeneous films. Highly tetrahedral amorphous carbon or "amorphous diamond" (a-D) films under high compressive stress have been successfully deposited using the plasma stream from a cathodic vacuum arc [2, 3]. Filtering by means of a curved magnetic solenoid is essential for the removal of neutral vapour and macroscopic particles of graphite from the arc beam during a-D deposition.

In this paper, we show that hydrogenation of the films, without reducing the  $\text{sp}^3$  diamond-like bonding in the material, can be achieved. The films are examined using electron energy loss spectroscopy (EELS) spectra and optical transmission spectra. A major part of this paper is concerned with the examination of the electronic conduction process in a-D.

## 2. Experimental method

The FCVA film deposition apparatus used is schematically shown in Fig. 1. The plasma gun and coating

chamber are separately pumped to give a base pressure below  $1 \times 10^{-7}$  Torr. A liquid nitrogen trap is also fitted just below the deposition chamber to reduce contamination by hydrocarbons (pump oil). The cathode is made of a high density and purity graphite disc 70 mm in diameter. The arc is ignited by bringing a graphite rod, which is connected to the anode (earthed), into contact

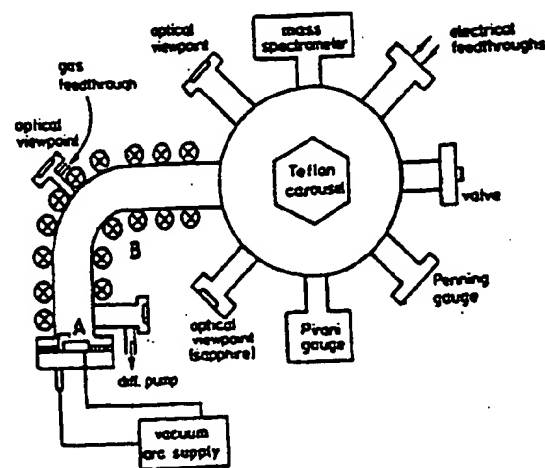


Fig. 1. Schematic diagram of filtered vacuum arc deposition unit.

**WEST****End of Result Set**

Generate Collection

Print

L21: Entry 26 of 26

File: TDBD

Jan 1, 1993

TDB-ACC-NO: NN9301225

DISCLOSURE TITLE: Surface Hardening of Ceramic and Glass Materials.

## PUBLICATION-DATA:

IBM Technical Disclosure Bulletin, January 1993, US

VOLUME NUMBER: 36

ISSUE NUMBER: 1

PAGE NUMBER: 225

PUBLICATION-DATE: January 1, 1993 (19930101)

CROSS REFERENCE: 0018-8689-36-1-225

## DISCLOSURE TEXT:

- This invention describes a structure and method for enhancing the properties of glass and ceramic materials by surface coating with amorphous diamond, which induces high compressive stress into the surface, provides coating of micro voids and cracks in the surface with a material that has the intrinsic properties of diamond and provides the surface with the chemical stability of diamond. Films of pure amorphous carbon with a high fraction of sp<sup>3</sup> bonds have been prepared by ion beam, laser beam and cathodic arc deposition. The properties of these films approach that of diamond as the sp<sup>3</sup> fraction increases. Some cathodic arc deposited carbon has sp<sup>3</sup> content of about 90 percent and the elastic constant and hardness measured essentially that of diamond, i.e., 1100 GPa and 90 GPa respectively. The films have a very large compressive stress, which will further enhance the stability of the material coated. We see the coating of glass or ceramic materials with amorphous dense carbon as a way to improve the properties of these materials and to maintain these property enhancements due to the chemical stability provided by the surface. - Griffith and Orocoan have shown that in amorphous materials brittle fracture occurs when initiated by micro-cracks through tensile failure. If the surface can be protected from scratches, atmospheric erosion and reaction or that the surface could be enhanced in compressive stress or, better still, all of the above; then the material will retain or be enhanced in its brittle fracture behaviors. Ceramics exhibit similar behavior to glass in terms of its brittle fracture behavior. The strengths of ceramics are low under tensile load, but exhibit high compressive strengths and can sustain appreciable loads.

SECURITY: Use, copying and distribution of this data is subject to the restrictions in the Agreement For IBM TDB Database and Related Computer Databases. Unpublished - all rights reserved under the Copyright Laws of the United States. Contains confidential commercial information of IBM exempt from FOIA disclosure per 5 U.S.C. 552(b)(4) and protected under the Trade Secrets Act, 18 U.S.C. 1905.

COPYRIGHT STATEMENT: The text of this article is Copyrighted (c) IBM Corporation 1993. All rights reserved.